


This information provided by:



Gross Automation
www.grossautomation.com

Call Toll Free:
800-349-5827

CARLON

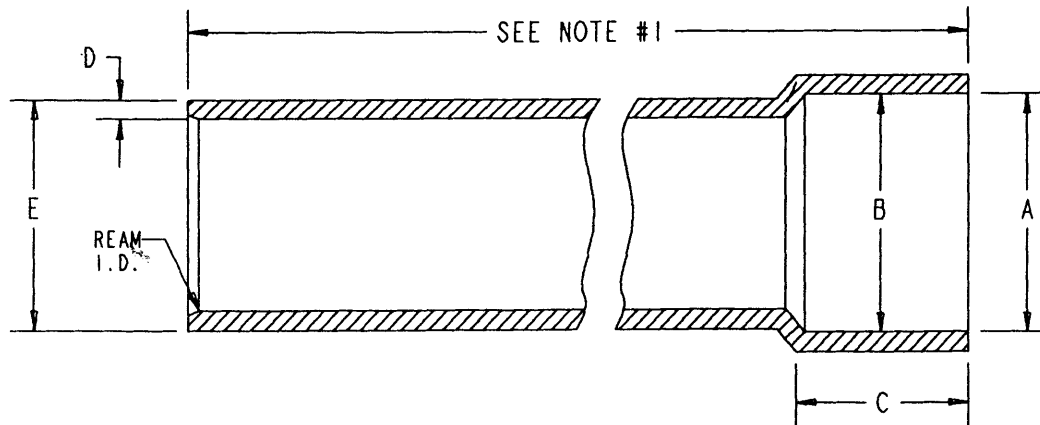

PART NO.	SIZE	A	B	"C" SOCKET DEPTH ENTRANCE TO SHOULDER		"D" WALL THICKNESS		"E" OUTSIDE DIAMETER	
		SOCKET ENTRANCE I.D. $\pm .05$	SOCKET BOTTOM I.D. $\pm .05$	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.
59610	1-1/2"	1.921	1.906	2.625	2.875	.145	.165	1.897	1.903
59611	2"	2.400	2.381	3.125	3.375	.154	.174	2.372	2.378
59612	2-1/2"	2.906	2.882	3.125	3.375	.203	.227	2.872	2.878
59613	3"	3.538	3.508	3.875	4.125	.216	.242	3.496	3.504
59615	4"	4.544	4.509	4.625	4.875	.237	.265	4.496	4.504
59616	5"	5.614	5.573	5.625	5.875	.258	.289	5.558	5.568
59617	6"	6.687	6.636	6.125	6.375	.280	.314	6.620	6.630
59618	8"	8.687	8.636	6.125	6.375	.322	.361	8.610	8.640

NOTES:

1. LENGTH: 10 FT. OR 20 FT. (+.50/-0.00) WITH BELLED END, UNLESS OTHERWISE SPECIFIED.
2. BELL ONE END AND REAM I.D. OF THE OTHER END TO CONFORM TO THE DIMENSIONS IN THE SPECIFICATION.

TITLE		PLUS® 40 RIGID PVC CONDUIT / LONG BELL		DRN	DATE	PART NO:	
LAMSON & SESSIONS		ALL DRAWINGS ARE THE PROPERTY OF LAMSON & SESSIONS AND SHALL NOT BE REPRODUCED IN ANY FORM WITHOUT LAMSON & SESSIONS' APPROVAL AND ARE TO BE PROMPTLY RETURNED UPON REQUEST.		DPR	2-23-99	SEE CHART	
				APP.	DATE	DRAWING NO:	REV.
				WL	2-24-99	AC03557	A