

This information provided by:




Gross Automation
www.grossautomation.com

Call Toll Free:
800-349-5827

FIBERGLASS WALL THICKNESS	LETTER DESIGNATION	O.D. IN (mm)
STANDARD	S	Ø 4.14 (105 mm)
HEAVY	H	Ø 4.18 (106 mm)
BULLET RESISTANT	B	Ø 4.25 (108 mm)

CATALOG NUMBER


M EC
3 = 3 WAY INNER DUCT
4 = 4 WAY INNER DUCT
S = STD WALL FIBERGLASS
H = HEAVY WALL FIBERGLASS
B = BULLET RES FIBERGLASS

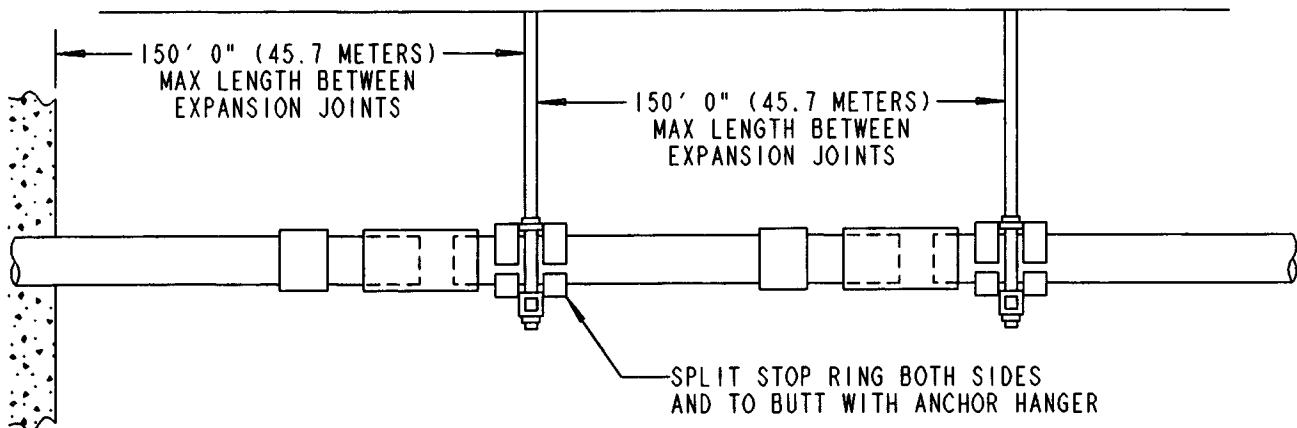

MALE END HOUSES FOUR (4) INNERDUCTS (4-WAY)
OR THREE (3) INNERDUCTS (3-WAY)
WHICH ARE FLUSH TO THE END OF THE PIPE

NOTE:
EXPANSION JOINT COMES ASSEMBLED WITH A
3" WIDE SPLIT, STOP RING THAT PRE-POSITIONS
THE ASSEMBLY AT THE MID-POINT OF THE 6" STROKE
AND MUST BE REMOVED AFTER INSTALLATION

FEMALE END HOUSES COUPLING BODY
WHICH IS FIXED AND FLUSH
TO THE END OF THE PIPE

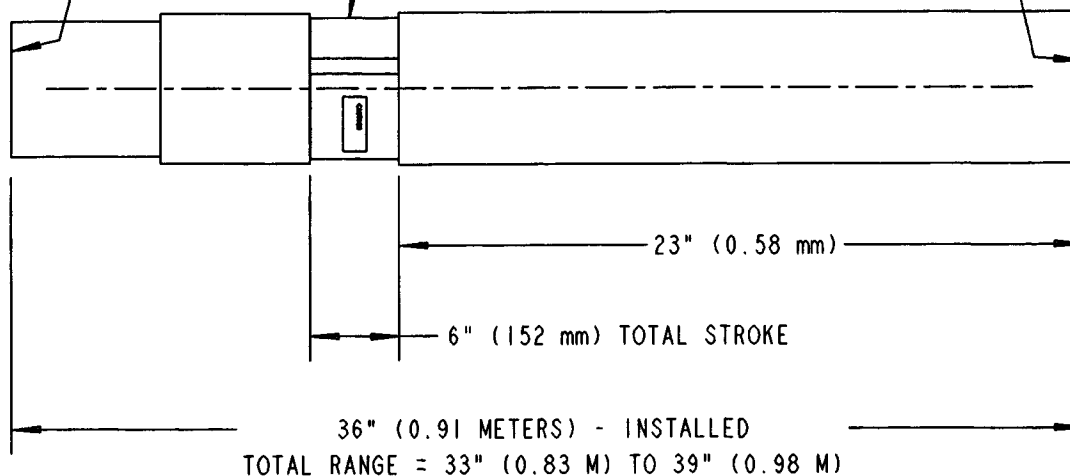

TITLE FIBERGLASS EXPANSION JOINT

DRN

DATE

PART NO:

SEE CHART

TCAT

10-6-92

LAMSON & SESSIONS

ALL DRAWINGS ARE THE PROPERTY OF LAMSON &
SESSIONS AND SHALL NOT BE REPRODUCED IN ANY
FORM WITHOUT LAMSON & SESSIONS' APPROVAL AND
ARE TO BE PROMPTLY RETURNED UPON REQUEST.

APP

DATE

DRAWING NO:

AC01178

REV.

B