

HP Series Enclosures with Hinged Quick-Release Cover

- Meets NEMA 1, 3, 3S, 4, 4X, 12, 13
- Meets IP 66



Himeline® HP Series enclosures for medium sized devices and equipment provide superior performance as junction and terminal wiring boxes, and instrument and control housing applications.

For indoor/outdoor industrial, MRO, and OEM applications. HP Series enclosures are resistant to corrosion, sunlight, chemicals, dirt, and moisture. Temperature range from -58° F to 320° F.

Features

- Projections for affixing cover mounted panel.
- Door locking mechanism convertible to key lock.
- M8x18 studs for back panel mounting (included).
- Hidden hinges open 185° for easy access.
- Multipositional DIN rail fixing components.
- Removable stainless steel hinge pins.
- Single piece construction.
- Opaque or tempered glass window option.
- Steel, nonmetallic & slotted back panels available.
- External & internal venting available.
- Hinged variable height inner panel option.
- Quick lock 1/4-turn entry.
- Underside grid pattern on inner door panel.
- Self-positioning panel depth adjusters.
- Pole mounting kit.
- Pedestal mounting capability.
- Sunlight resistant.

Applications

- Junction boxes.
- Terminal wiring boxes.
- Instrument and control housing.
- Indoor or outdoor use.

Standards

- NEMA Type 1, 3, 3S, 4, 4X, 12, 13.
- UL Listed per UL 50, enclosures for electrical equipment.
- CSA certified.
- Meets IP 66.

Material

- Lids/Bases – Fiberglass reinforced polyester.



HP Series Enclosures with Hinged Quick-Release Cover

Specifications

Enclosure With Opaque Cover Part Nos.	Std. Ctn. Wt. (lbs.)	Enclosure With Clear Window*	Std. Ctn. Wt. (lbs.)	Window Dimension (H x W) (in.)	Dimensions										Std. Ctn. Qty.
					External			Internal			Mounting		Window		
					A	B	C	D	E	F	G	H	J	K	
HP1612B	11.04	HC1612B	12.5	11 x 7.87	16.93	12.99	7.87	14.96	10.24	6.61	14.76	5.91	11.02	7.87	1
HP2016B	16.80	HC2016B	17.2	14.96 x 11.81	20.87	16.93	7.87	18.90	14.17	6.61	18.70	9.84	14.96	11.81	1
HP2416C	21.13	HC2416C	24.12	18.89 x 11.81	25.47	17.17	9.84	22.83	14.17	8.35	22.64	9.84	18.90	11.81	1
HP3020D	32.28	HC3020D**	36.02	22.83 x 15.74	29.41	21.10	11.81	26.77	18.11	10.28	26.57	13.78	22.83	15.75	1
HP3325D	39.00	HC3325D**	43.12	26.77 x 19.68	33.35	25.04	11.81	30.71	22.05	10.28	30.51	17.72	26.77	19.69	1

* HC Enclosures are IP 65 Rated. Clear window is glass.

** This series of enclosures come standard with body, lid and mounting rail kit.

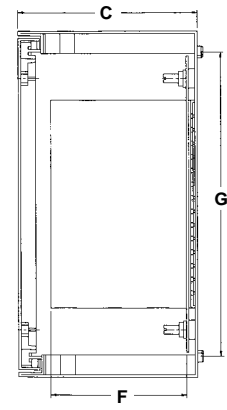
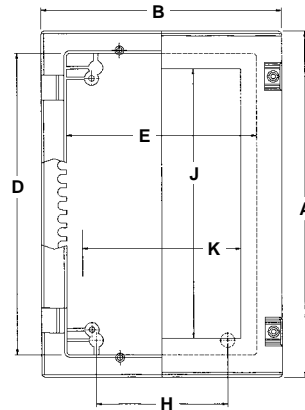


Depth with back panel installed

Hinged Internal Door

- Internal fiberglass reinforced polyester door assembly.
- Grid pattern on the inside for quicker positioning of equipment.
- Quick locking 1/4-turn entry.

Part Numbers	A		B		C		D		Std. Ctn. Qty.	Std. Ctn. Wt. (lbs.)
	in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)		
PID1612	12.40	(315)	18.07	(205)	5.98	(152)	1.02	(26)	1	2.05
PID2016	16.34	(415)	12.00	(305)	5.98	(152)	1.02	(26)	1	3.15
PID2416	20.28	(515)	12.00	(305)	7.64	(194)	1.26	(32)	1	4.50
PID3020	24.21	(615)	15.94	(405)	9.61	(244)	1.26	(32)	1	6.50
PID3325	28.15	(715)	19.88	(505)	9.61	(244)	1.26	(32)	1	8.45




Accessories

Back Panels Dimensions


A complete range of plates, which can be directly fixed to the enclosure supports or to the adjustable depth supports.

Steel Back Panels Steel back panels are white painted 14 gauge steel.

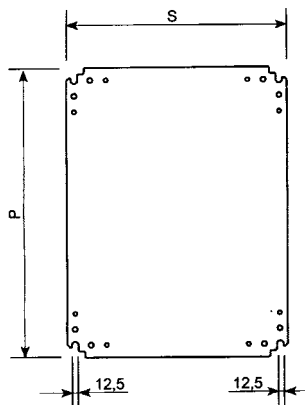


To Fit Enclosures	Part Numbers	Thickness in. (mm)	Weight lbs. (kg)	P in.	S in.
HP1612B	PMM1612	.079 (2)	3.10 (1.6)	14.37	9.84
HP2016B	PMM2016	.079 (2)	6.15 (2.5)	18.30	13.78
HP2416C	PMM2416	.079 (2)	8.0 (3.1)	22.24	13.78
HP3020D	PMM3020	.079 (2)	12.04 (4.6)	26.18	17.72
HP3325D	PMM3325	.118 (3)	20.0 (9.9)	30.11	21.65

PVC Insulating Back Panels PVC back panels are made from 1/4" PVC and meet UL94 V-O.

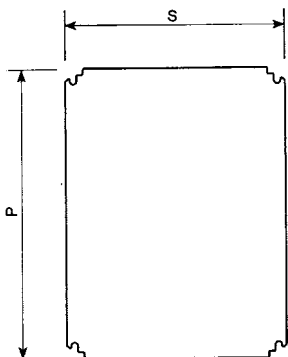

To Fit Enclosures	Part Numbers	Weight lbs. (kg)	P in. (mm)	S in. (mm)
HP1612B	PMB1612	1.10 (0.5)	14.37 (365)	9.84 (250)
HP2016B	PMB2016	2.65 (1.2)	18.30 (465)	13.78 (350)
HP2416C	PMB2416	3.09 (1.4)	22.24 (565)	13.78 (350)
HP3020D	PMB3020	4.63 (2.1)	26.18 (665)	17.72 (450)
HP3325D	PMB3325	6.62 (3.0)	30.11 (765)	21.65 (550)

Slotted Back Panels Zinc dichromated coated steel plates perforated for addition of electrical circuitry.

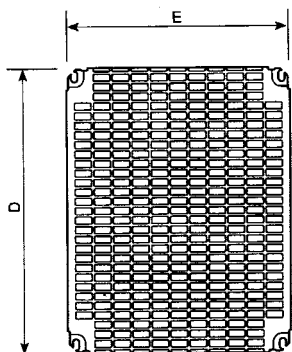


To Fit Enclosures	Part Numbers	Weight lbs. (kg)	D in. (mm)	E in. (mm)
HP1612B	PMR1612	1.54 (0.7)	13.74 (349)	9.8 (251)
HP2016B	PMR2016	2.87 (1.3)	17.72 (450)	13.82 (351)
HP2416C	PMR2416	3.53 (1.6)	21.85 (555)	13.82 (351)
HP3020D	PMR3020	5.07 (2.3)	25.39 (645)	17.76 (451)
HP3325D	PMR3325	7.06 (3.2)	29.53 (750)	21.69 (551)

Refer to the Enclosure Accessories section for back panel accessories.


Accessories

Pole Mounting Set

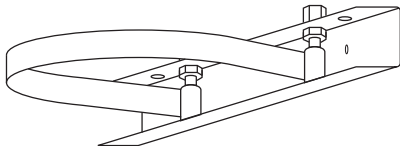


Part Numbers	To Fit To Enclosures	Standard Carton Quantity
HPPF300	HP1612B	1
HPPF400	HP2016B HP2416C	1
HPPF500	HP3020D	1
HPPF600	HP3325D	1

35 mm Symmetrical DIN Rail



Part Numbers	To Fit To Enclosures	Width (in.)	Std. Ctn. Qty.
HPCO300	HP1612B	11.02	1
HPCO400	HP2016B, HP2416C	14.96	1
HPCO500	HP3020D	18.90	1

Rail Mounting Insert




Part Number	Features	Standard Carton Quantity
HPRFK	Fits all enclosures	1

Wall Mounting Set (includes brass inserts and installation tools)



Part Number	Standard Carton Quantity	Standard Carton Weight (lbs.)
HPWMF	4	0.1

Blanking Grommet To close off openings on enclosure backs.



Part Numbers	Fits Enclosure Sizes	Description	Std. Ctn. Qty.	Std. Ctn. Wt. (lbs.)
HPBNGB	16 x 12 and 20 x 16	Blanking Grommet	Set of 4	1.00
HPBNGC	24 x 16, 30 x 20 and 33 x 25	Blanking Grommet	Set of 4	1.00

Accessories

Fixing Accessories For Slotted Plates




Part Numbers	FIXING NUT		FIXING BOLT WITH WASHER		
	Type Of Thread	Std. Ctn. Qty.	Part Numbers	Length (in.)	Std. Ctn. Qty.
HPFA4	M4	100	HPFB104	.39	100
HPFA4	M4	100	HPFB164	.63	100
HPFA5	M5	100	HPFB125	.47	100
HPFA5	M5	100	HPFB185	.71	100
HPFA6	M6	100	HPFB126	.47	100
HPFA6	M6	100	HPFB186	.71	100

For slotted back panels, see page 34


Back Panel Depth Adjustable Supports

Supports designed to fit 7.87" (200 mm), 9.84" (250 mm), 11.81" (300 mm) and 13.78" (350 mm) deep enclosures. Self-positioning slots allow for adjustment every .49" (12.5 mm). Made of zinc dichromated coated steel.




To Fit Enclosures	Part Numbers	A in./mm	B in./mm	Standard Carton Quantity
HP1612B & HP2016B	HPLM200 HPLM200	5.98/152	3.90/99	1 set of 4
HP2416C	HPLM250	8.07/205	4.13/105	1 set of 4
HP3020D & HP3325D	HPLM300 HPLM300	10.04/255	8.07/205	1 set of 4

Pedestal Mount



Part Number	To Fit To Enclosures	Standard Carton Qty.
HPSFS1	HP2016B HP2416C	1

Draining Device* For 3R Rating and condensation build-up.



Part Number	Standard Carton Qty.
HPVEA9	1

*Factory installation available.

Accessories


Air Vents* NEMA 1 Rated only.



Part Numbers	Style	Standard Carton Qty.
HPVM25	For fitting outside of all enclosures	1
HPVM35	For fitting inside of all enclosures	1

*Factory installation available.

Enclosure Ventilator* Allows any size enclosure to breathe, yet remains watertight.



Part Number	Standard Carton Qty.
HVM27	1


*Factory installation available.

Coupling Frame For Himeline HP Enclosures HP3020D and HP3325D




Part Number	Standard Carton Qty.
HPBU	1

Replacement Standard Handle



Part Number	Standard Carton Quantity	Standard Carton Weight (lbs.)
HPRSH	1	0.05

Locks For Himeline HP Enclosures



Replacement Door Lock

Part Number	Std. Ctn. Qty.
HPRLA	1

For replacement handle, order HPRSH.



Cylinder Key Lock (Keyed Alike)

Part Number	Std. Ctn. Qty.
HPTPLM	1

For replacement key, order HPRKO.



Padlocking Service

Part Number	Std. Ctn. Qty.
HPPLH	1

For All Enclosures



Painted JIC enclosure with painted back panel. Installed clear cover with handle and quick-release latch.



Color molded JIC unit with addition of window and pushbuttons.



Molded junction box painted with addition of mounted in-use weatherproof cover.



Painted JIC enclosure with pocket installed in cover for control pad.

Color Molded Enclosures

All Circuit Safe® enclosures can be molded in a variety of colors. Minimum quantities for single shipment or releases against blanket orders are required.

Painted/Silkscreened Enclosures

All enclosures can be painted, interior and exterior, or by special request. Enclosure covers can also be silkscreened on request.

EMI/RFI Protection

For applications where Radio Frequency Interference is a factor, the interior can be coated with an acrylic base paint with a nickel filler. Windows can be covered with fine copper mesh.

Other Modifications Available

Our factory is capable of modifying any of our enclosures to a customer's specifications. Factory's capabilities include:

- Precision milling of button holes, windows, and pockets for keypad installations.
- Hole tapping.
- Ventilators.
- Mounting bosses.
- Access windows.
- Hinged windows.
- Mounted in use weatherproof covers.
- Handles for portable units.
- Latches.
- Enclosure coolers.
- Cylinder locking systems.
- And more!

NEMA Types – Definitions Pertaining to Nonhazardous Locations



















Enclosures for Electrical Equipment

An enclosure is a surrounding case constructed to provide protection from accidental contact with the enclosed equipment and to provide protection to the enclosed equipment from specified environmental conditions. A brief description of the more common types of enclosures used by the electrical industry follows.

- Type 1 Enclosure:** Intended for indoor use primarily to provide protection against contact with enclosed equipment and a degree of protection against falling dirt.
- Type 2 Enclosure:** Intended for indoor use primarily to provide a degree of protection against limited amounts of falling water and dirt.
- Type 3 Enclosure:** Intended for outdoor use primarily to provide a degree of protection against wind-blown dust, rain, sleet and external ice formation.
- Type 3R Enclosure:** Intended for outdoor use primarily to provide a degree of protection against falling rain, sleet and external ice formation.
- Type 3S Enclosure:** Intended for outdoor use primarily to provide a degree of protection against wind-blown dust, rain, and sleet, and to provide for operation of external mechanism when ice laden.
- Type 3X Enclosure:** Intended for outdoor use primarily to provide a degree of protection against wind-blown dust, rain, sleet, external ice formation, and corrosion.
- Type 3SX Enclosure:** Intended for outdoor use primarily to provide a degree of protection against wind-blown dust, rain, sleet, and corrosion, and to provide for operation of external mechanism when ice laden.
- Type 4 Enclosure:** Intended for indoor or outdoor use primarily to provide a degree of protection against wind-blown dust and rain, splashing water and hose-directed water.
- Type 4X Enclosure:** Intended for indoor or outdoor use primarily to provide a degree of protection against corrosion, wind-blown dust and rain, splashing water and hose-directed water.
- Type 6 Enclosure:** Intended for indoor or outdoor use primarily to avoid a degree of protection against contact with enclosed equipment, falling dirt, hose-directed water, entry of water during occasional temporary submersion at a limited depth and external ice formation.
- Type 6P Enclosure:** Intended for indoor or outdoor use primarily to provide a degree of protection against contact with enclosed equipment, falling dirt, hose-directed water, entry of water during prolonged submersion at a limited depth and external ice formation.
- Type 12 Enclosure:** Intended for indoor use primarily to provide a degree of protection against dust, falling dirt and dripping noncorrosive liquids.
- Type 13 Enclosure:** Intended for indoor use primarily to provide a degree of protection against dust, spraying of water, oil and noncorrosive coolant.

International Standards IP Protection Classification Data

The letters IP followed by three characteristic numbers symbolize the degree of protection.

First Digit		Second Digit	
Protection Against Solid Bodies		Protection Against Liquids	
IP	Test	IP	Test
0	 No protection	0	 No protection
1	 Protection against solid bodies larger than 50 mm (for example accidentally touching with the hand)	1	 Protection against vertical water drops condensation
2	 Protection against solid bodies larger than 12 mm (for example a finger)	2	 Protected against water drops at up to 15° from the vertical
3	 Protection against solid bodies larger than 2.5 mm (tools, wires)	3	 Protected against rain at up to 60° from the vertical
4	 Protection against solid bodies larger than 1 mm (tools, small wires)	4	 Δ Protected against water splashing from all directions
5	  Protection against dust (no harmful deposits)	5	 $\Delta \Delta$ Protected against water sprayed from a hose from all directions
6	  Complete protection against dust	6	 Protected against water projections similar to sea wave splashes
		7	 $\Delta \Delta$ Protected against the effector immersion
		8	 $\Delta \Delta \dots m$ Protected against effects of prolonged immersion under pressure

Clearance Holes For Carflex® Fittings or PVC Male Terminal Adapters

Carflex Fittings & PVC Male Terminal Adapters Trade Sizes	Nominal Size (in.)	Actual Size (in.)	Actual Size (mm)
1/2	.875	.879	22.4
3/4	1.093	1.107	28.2
1	1.344	1.357	34.6
1 1/4	1.813	1.699	43.2
1 1/2	1.938	1.949	49.6
2	2.375	2.413	61.5
2 1/2	2.875	2.914	74.0
3	3.5	3.539	89.8
3 1/2	4	4.044	102.7
4	4.5	4.544	115.4
5	5.625	5.675	143.7

Engineering Properties Of Enclosures

Property	Test Method	Opaque Polycarbonate Covers & Boxes	Clear Polycarbonate Cover	FRP
Thermal And Mechanical				
Temperature Range (°F)	-	-30° to 230°	-30° to 230°	-58° to 320°
Specific Gravity (oz./in ³)	ASTM D792	1.20	1.20	1.79
Thermal Conductivity (BTU•in/hr•ft ² •°F)	ASTM D177	1.35	1.35	1.68
Heat Deflection Temperature @ 264 PSI (°F)	ASTM D648	265	260	392
Tensile Strength (PSI)	ASTM D638	8,800	9,000	13,000
Flexural Strength (PSI)	ASTM D790	13,500	14,000	19,000
Compressive Strength @ 10% Deformation (PSI)	ASTM D695	12,500	12,500	24,000
Impact Strength IZOD Notched (ft.lbs./in.)	ASTM D256	12	12	12
Water Absorption – 24 hrs. @ 73°F (%)	ASTM D570	0.15	0.15	0.17
Electrical				
Dielectric Strength (VOLTS/MIL.)	ASTM D149	380	380	467
Dielectric Constant	ASTM D150			
60 Hz		3.0	3.0	-
100 Hz		-	-	-
106		2.96	2.96	-
Volume Resistivity @ 73°F (OHM-CM)	ASTM D257	>10 ¹⁶	>10 ¹⁶	2.0 x 10 ¹⁵
Arc Resistance (SEC)	ASTM D495	120	120	200+

Chemical Resistance Data

Environmental Resistance Table: E-Excellent, G-Good, L-Limited, U-Unsatisfactory

IMPORTANT: These environmental resistance ratings are based upon tests where the specimens were placed in complete submergence in the reagent listed. Ratings listed in this chart apply to a 48-Hour exposure period. (The information in this chart is to be used **ONLY** as a guide in selecting equipment for appropriate chemical compatibility. Before permanent installation, test the equipment with the chemicals and under the specific conditions of your application.)

Chemical	PVC Himeline HE - Opaque Cover w/Base	Polycarbonate Circuit Safe NEMA Circuit Safe JIC Himeline HE - Clear Cover w/Base Himeline HS - Opaque w/Clear Lids	FRP (Fiberglass Reinforced Polyester) Himeline HS - Bases Himeline HP Himeline HLA/HLS Himeline HLP	Noryl Circuit Safe Medium JIC
Acetaldehyde	U	L	-	-
Acetamide	U	U	-	-
Acetate Solvent	U	-	-	U
Acetic Acid	U	G	E	E
Acetic Acid 20%	U	E	E	E
Acetic Acid 80%	L	G	E	E
Acetic Acid, Glacial	U	G	E	E
Acetic Anhydride	U	U	E	U
Acetone	U	U	U	U
Acetyl Bromide	U	-	-	-
Acetyl Chloride (dry)	L	U	-	U
Acetylene	E	U	-	-
Acrylonitrile	G	U	-	-
Adipic Acid	E	-	-	-
Alcohols:Amyl	E	G	-	L
Alcohols:Benzyl	U	-	-	U
Alcohols:Butyl	E	E	-	E
Alcohols:Diacetone	G	-	-	E
Alcohols:Ethyl	L	G	-	E
Alcohols:Hexyl	E	-	-	E
Alcohols:Isobutyl	E	-	-	E
Alcohols:Isopropyl	E	E	-	E
Alcohols:Methyl	E	G	-	E
Alcohols:Octyl	-	-	-	E
Alcohols:Propyl	E	-	-	E
Aluminum Chloride	E	E	E	E
Aluminum Chloride 20%	E	E	-	E
Aluminum Fluoride	E	-	-	E
Aluminum Hydroxide	E	G	-	E
Aluminum Nitrate	G	E	-	-
Aluminum Potassium Sulfate 10%	E	E	-	E
Aluminum Potassium Sulfate 100%	E	E	-	E
Aluminum Sulfate	E	E	E	E
Amines	U	U	-	U
Ammonia 10%	G	U	-	E
Ammonia Nitrate	G	-	-	E
Ammonia, anhydrous	E	U	-	G
Ammonia, liquid	E	U	L	-
Ammonium Acetate	E	-	-	-
Ammonium Bifluoride	E	-	-	E
Ammonium Carbonate	E	-	L	E
Ammonium Caseinate	-	-	-	E
Ammonium Chloride	E	E	E	E
Ammonium Hydroxide	E	U	L	E
Ammonium Nitrate	E	-	L	E
Ammonium Oxalate	E	E	-	-
Ammonium Persulfate	E	-	-	E
Ammonium Phosphate, Dibasic	E	E	-	E
Ammonium Phosphate, Monobasic	E	-	-	E
Ammonium Phosphate, Tribasic	E	-	-	E
Ammonium Sulfate	E	E	E	E
Ammonium Sulfite	E	-	E	E
Amyl Acetate	U	U	L	U
Amyl Alcohol	E	G	L	L
Amyl Chloride	U	-	U	U
Aniline	L	U	U	U
Aniline Hydrochloride	G	U	-	-
Antifreeze	E	-	-	E
Antimony Trichloride	E	E	E	E
Aqua Regia (80% HCl, 20% HNO3)	L	U	-	U

Chemical	PVC Himeline HE - Opaque Cover w/Base	Polycarbonate Circuit Safe NEMA Circuit Safe JIC Himeline HE - Clear Cover w/Base Himeline HS - Opaque w/Clear Lids	FRP (Fiberglass Reinforced Polyester) Himeline HS - Bases Himeline HP Himeline HLA/HLS Himeline HLP	Noryl Circuit Safe Medium JIC
Aromatic Hydrocarbons	U	-	-	U
Arsenic Acid	E	E	-	E
Arsenic Salts	E	-	-	-
Asphalt	E	U	-	-
Barium Carbonate	E	E	E	E
Barium Chloride	E	E	E	E
Barium Cyanide	U	-	-	-
Barium Hydroxide	E	U	U	E
Barium Nitrate	E	U	-	E
Barium Sulfate	G	U	E	E
Barium Sulfide	E	-	E	E
Beer	E	E	-	E
Beet Sugar Liquids	E	-	-	E
Benzaldehyde	U	U	U	G
Benzene	L	U	L	U
Benzene Sulfonic Acid	E	U	E	E
Benzoic Acid	E	G	-	G
Benzol	-	-	-	G
Benzonitrile	-	E	-	-
Benzyl Chloride	-	-	-	U
Bleaching Liquors	E	-	-	-
Borax (Sodium Borate)	E	-	-	E
Boric Acid	E	-	E	E
Bromine	L	L	-	E
Butadiene	L	U	-	U
Butane	L	U	-	U
Butanol (Butyl Alcohol)	L	G	-	E
Butyl Amine	U	U	-	U
Butyl Ether	E	-	-	U
Butyl Phthalate	-	U	-	E
Butylacetate	U	U	U	G
Butylene	E	U	-	-
Butyric Acid	G	U	-	U
Calcium Bisulfate	-	U	-	-
Calcium Bisulfide	E	-	-	E
Calcium Bisulfite	G	U	-	E
Calcium Carbonate	E	L	E	E
Calcium Chlorate	G	-	E	-
Calcium Chloride	L	-	E	E
Calcium Hydroxide	G	U	U	E
Calcium Hypochlorite	G	U	L	E
Calcium Nitrate	E	E	E	E
Calcium Oxide	G	-	-	E
Calcium Sulfate	G	E	E	E
Calgon	-	-	-	E
Cane Juice	E	-	-	-
Carbolic Acid (Phenol)	U	U	-	U
Carbon Bisulfide	U	-	L	-
Carbon Dioxide (dry)	E	-	-	E
Carbon Dioxide (wet)	E	-	-	E
Carbon Disulfide	U	U	-	E
Carbon Monoxide	E	-	-	U
Carbon Tetrachloride	U	U	E	U
Carbon Tetrachloride (dry)	-	-	-	U
Carbon Tetrachloride (wet)	-	-	-	U
Carbonated Water	E	-	-	E
Carbonic Acid	E	E	-	E
Catsup	E	-	-	E
Chloric Acid	E	-	-	U
Chlorine (dry)	U	-	-	G

Chemical Resistance Data

Environmental Resistance Table: *E-Excellent, G-Good, L-Limited, U-Unsatisfactory*

IMPORTANT: These environmental resistance ratings are based upon tests where the specimens were placed in complete submergence in the reagent listed. Ratings listed in this chart apply to a 48-Hour exposure period. (The information in this chart is to be used **ONLY** as a guide in selecting equipment for appropriate chemical compatibility. Before permanent installation, test the equipment with the chemicals and under the specific conditions of your application.)

Chemical	PVC	Polycarbonate	FRP	Noryl	Chemical	PVC	Polycarbonate	FRP	Noryl
	Himeline HE - Opaque Cover w/Base	Circuit Safe NEMA Circuit Safe JIC Himeline HE - Clear Cover w/Base Himeline HS - Opaque w/Clear Lids	(Fiberglass Reinforced Polyester) Himeline HS - Bases Himeline HP Himeline HLA/HLS Himeline HLP	Circuit Safe Medium JIC		Himeline HE - Opaque Cover w/Base	Circuit Safe NEMA Circuit Safe JIC Himeline HE - Clear Cover w/Base Himeline HS - Opaque w/Clear Lids	(Fiberglass Reinforced Polyester) Himeline HS - Bases Himeline HP Himeline HLA/HLS Himeline HLP	Circuit Safe Medium JIC
Chlorine Water	E	-	E	L	Ferrous Sulfate	E	E	E	E
Chlorine, Anhydrous Liquid	U	L	-	G	Fluoboric Acid	E	-	-	E
Chloroacetic Acid	G	U	-	-	Fluorine	U	L	-	-
Chlorobenzene (Mono)	U	U	U	U	Fluosilicic Acid	U	E	-	E
Chlorobromomethane	U	-	-	-	Formaldehyde 100%	E	E	-	E
Chloroform	U	U	-	U	Formaldehyde 40%	E	E	E	E
Chlorosulfonic Acid	U	L	-	U	Formic Acid	E	E	L	E
Chocolate Syrup	-	E	-	E	Freon 113	G	G	-	U
Chromic Acid 10%	E	G	E	E	Freon 12	E	-	-	U
Chromic Acid 30%	E	L	-	U	Freon 22	E	-	-	G
Chromic Acid 5%	E	G	-	E	Freon TF	G	-	-	-
Chromic Acid 50%	U	U	-	U	Freon® 11	E	-	-	G
Chromium Salts	E	-	-	-	Fuel Oils	E	G	-	G
Citric Acid	G	E	E	E	Furan Resin	E	-	-	-
Citric Oils	-	-	-	E	Furfural	U	U	L	U
Clorox® (Bleach)	E	-	-	E	Gallic Acid	G	-	-	E
Copper Chloride	E	-	-	E	Gasoline (high-aromatic)	E	E	-	G
Copper Cyanide	E	U	-	E	Gasoline, leaded, ref.	G	E	E	G
Copper Fluoborate	E	-	-	-	Gasoline, unleaded	L	E	-	U
Copper Nitrate	E	U	-	E	Gelatin	G	-	-	E
Copper Sulfate >5%	E	E	-	E	Glucose	E	E	E	E
Copper Sulfate 5%	E	E	-	E	Glue, P.V.A.	L	-	-	-
Cresols	U	U	U	U	Glycerin	E	E	E	E
Cresylic Acid	U	U	-	-	Glycolic Acid	G	-	-	-
Cupric Acid	E	E	-	E	Grease	E	-	-	-
Cyclohexane	U	G	-	U	Heptane	L	G	E	G
Cyclohexanone	U	U	-	U	Hexane	G	U	U	G
Detergents	E	E	-	E	Hydraulic Oil (Petro)	E	-	-	-
Diacetone Alcohol	U	U	-	-	Hydraulic Oil (Synthetic)	E	-	-	-
Dichlorobenzene	U	U	-	-	Hydrazine	-	U	-	-
Dichloroethane	U	U	-	E	Hydrobromic Acid 100%	E	-	-	G
Diesel Fuel	E	E	-	U	Hydrobromic Acid 20%	G	-	-	E
Diethyl Ether	U	U	-	-	Hydrochloric Acid 100%	U	U	-	E
Diethylamine	U	U	-	-	Hydrochloric Acid 20%	E	G	E	E
Diethylene Glycol	L	G	-	E	Hydrochloric Acid 37%	G	U	L	E
Dimethyl Aniline	U	U	U	U	Hydrochloric Acid, Dry Gas	E	-	-	E
Dimethyl Formamide	U	U	-	U	Hydrocyanic Acid	G	-	-	E
Diphenyl Oxide	U	-	-	-	Hydrocyanic Acid (Gas 10%)	E	G	-	L
Dyes	G	-	-	E	Hydrofluoric Acid 100%	L	U	-	U
Epsom Salts (Magnesium Sulfate)	E	E	-	E	Hydrofluoric Acid 20%	G	U	-	L
Ethane	E	-	-	-	Hydrofluoric Acid 50%	G	U	-	U
Ethanol	L	G	-	E	Hydrofluoric Acid 75%	L	U	-	U
Ethanolamine	U	-	-	E	Hydrofluosilicic Acid 100%	G	-	-	G
Ether	U	-	L	U	Hydrofluosilicic Acid 20%	E	-	-	G
Ethyl Acetate	U	U	L	E	Hydrogen Gas	E	E	-	E
Ethyl Benzoate	U	U	-	E	Hydrogen Peroxide 10%	E	E	-	E
Ethyl Chloride	U	U	L	U	Hydrogen Peroxide 100%	E	E	-	E
Ethyl Ether	U	-	U	U	Hydrogen Peroxide 30%	E	E	E	E
Ethylene Bromide	U	U	-	-	Hydrogen Peroxide 50%	E	E	E	-
Ethylene Chloride	U	U	-	U	Hydrogen Sulfide (aqua)	G	E	-	E
Ethylene Chlorohydrin	U	U	E	-	Hydrogen Sulfide (dry)	E	-	-	-
Ethylene Diamine	U	E	-	U	Hydroquinone	G	-	-	-
Ethylene Dichloride	U	U	U	U	Hydroxyacetic Acid 70%	U	-	-	-
Ethylene Glycol	E	G	E	E	Ink	L	-	-	-
Ethylene Oxide	U	L	-	E	Iodine	E	-	-	L
Fatty Acids	E	G	-	E	Iodine (in alcohol)	E	-	-	-
Ferric Chloride	E	E	E	E	Iodoform	E	-	-	-
Ferric Nitrate	E	E	E	E	Isocetane	E	G	-	U
Ferric Sulfate	E	E	E	E	Isopropyl Acetate	U	U	-	-
Ferrous Chloride	E	U	E	E	Isopropyl Ether	G	U	-	-

Chemical Resistance Data

Environmental Resistance Table: E-Excellent, G-Good, L-Limited, U-Unsatisfactory

IMPORTANT: These environmental resistance ratings are based upon tests where the specimens were placed in complete submergence in the reagent listed. Ratings listed in this chart apply to a 48-Hour exposure period. (The information in this chart is to be used **ONLY** as a guide in selecting equipment for appropriate chemical compatibility. Before permanent installation, test the equipment with the chemicals and under the specific conditions of your application.)

Chemical	PVC Himeline HE - Opaque Cover w/Base	Polycarbonate Circuit Safe NEMA Circuit Safe JIC Himeline HE - Clear Cover w/Base Himeline HS - Opaque w/Clear Lids	FRP (Fiberglass Reinforced Polyester) Himeline HS - Bases Himeline HP Himeline HLA/HLS Himeline HLP	Noryl Circuit Safe Medium JIC
Isotane	E	-	-	-
Jet Fuel (JP3, JP4, JP5)	L	E	-	U
Kerosene	E	U	-	U
Ketones	U	U	-	U
Lacquer Thinners	U	G	-	U
Lacquers	U	U	-	U
Lactic Acid	G	G	E	E
Lard	E	E	-	E
Lead Acetate	G	-	-	E
Lead Nitrate	E	-	-	E
Lead Sulfamate	G	E	-	-
Lime	G	-	-	-
Linoleic Acid	E	-	-	-
Lithium Chloride	U	G	-	-
Lithium Hydroxide	-	U	-	-
Lubricants	G	E	-	L
Lye: Ca(OH) ₂ Calcium Hydroxide	G	U	-	E
Lye: KOH Potassium Hydroxide	G	U	-	E
Lye: NaOH Sodium Hydroxide	E	U	-	E
Magnesium Bisulfate	E	E	-	-
Magnesium Carbonate	G	E	E	E
Magnesium Chloride	G	E	E	E
Magnesium Hydroxide	E	E	G	E
Magnesium Nitrate	E	E	-	E
Magnesium Oxide	-	-	-	-
Magnesium Sulfate (Epsom Salts)	E	E	E	E
Maleic Acid	E	-	-	E
Malic Acid	E	-	-	-
Manganese Sulfate	L	E	-	E
Mayonnaise	U	-	-	-
Melamine	U	-	-	-
Mercuric Chloride (dilute)	E	E	-	E
Mercuric Cyanide	E	-	-	-
Mercurous Nitrate	E	E	-	E
Mercury	E	U	-	E
Methane	G	-	-	-
Methanol (Methyl Alcohol)	E	G	L	E
Methyl Acetate	U	U	-	-
Methyl Acetone	U	-	-	-
Methyl Alcohol 10%	E	G	-	E
Methyl Bromide	U	-	-	-
Methyl Butyl Ketone	E	U	-	-
Methyl Cellosolve	U	U	-	-
Methyl Chloride	U	U	-	U
Methyl Dichloride	E	-	-	-
Methyl Ethyl Ketone	U	U	E	U
Methyl Isobutyl Ketone	U	U	-	U
Methyl Isopropyl Ketone	U	U	-	U
Methyl Methacrylate	E	-	-	-
Methylamine	U	-	-	-
Methylene Chloride	U	U	U	U
Mineral Spirits	E	L	-	E
Monochloroacetic acid	-	U	-	-
Monoethanolamine	U	-	-	E
Morpholine	-	U	-	U
Motor oil	G	E	-	E
Naphtha	E	G	E	U
Naphthalene	U	-	-	U
Natural Gas	E	-	-	-
Nickel Chloride	E	E	-	E

Chemical	PVC Himeline HE - Opaque Cover w/Base	Polycarbonate Circuit Safe NEMA Circuit Safe JIC Himeline HE - Clear Cover w/Base Himeline HS - Opaque w/Clear Lids	FRP (Fiberglass Reinforced Polyester) Himeline HS - Bases Himeline HP Himeline HLA/HLS Himeline HLP	Noryl Circuit Safe Medium JIC
Nickel Nitrate	E	U	-	E
Nickel Sulfate	E	E	-	E
Nitrating Acid (<15% HNO ₃)	U	-	-	-
Nitrating Acid (>15% H ₂ SO ₄)	U	-	-	-
Nitrating Acid (1% Acid)	U	-	-	-
Nitrating Acid (15% H ₂ SO ₄)	U	-	-	-
Nitric Acid (20%)	E	G	G	G
Nitric Acid (50%)	G	G	-	G
Nitric Acid (5-10%)	E	E	-	E
Nitric Acid (Concentrated)	G	L	-	G
Nitrobenzene	U	U	L	U
Nitromethane	G	U	-	U
Nitrous Acid	E	-	-	-
Nitrous Oxide	E	-	-	-
Oils:Aniline	U	-	-	U
Oils:Citric	G	E	-	E
Oils:Creosote	L	-	-	U
Oils:Diesel Fuel (20, 30, 40, 50)	G	-	-	U
Oils:Fuel (1, 2, 3, 5A, 5B, 6)	E	G	-	E
Oils:Hydraulic Oil (Petro)	E	-	-	-
Oils:Hydraulic Oil (Synthetic)	E	-	-	-
Oils:Mineral	G	G	-	E
Oils:Olive	L	E	-	E
Oils:Orange	L	L	-	-
Oils:Pine	U	E	-	-
Oils:Rosin	L	-	-	-
Oils:Silicone	E	-	-	E
Oils:Transformer	G	-	-	-
Oils:Turbine	E	-	-	-
Oleic Acid	L	-	E	E
Oleum 100%	U	-	-	E
Oleum 25%	U	-	-	-
Oxalic Acid (cold)	G	-	E	E
Ozone	G	E	-	-
Palmitic Acid	G	-	-	-
Paraffin	G	E	-	E
Pentane	E	E	-	-
Perchloric Acid	L	-	-	-
Perchloroethylene	L	U	-	U
Petrolatum	G	-	-	-
Petroleum	-	-	-	U
Phenol (10%)	L	G	L	U
Phenol (Carbolic Acid)	U	U	-	U
Phosphoric Acid (>40%)	G	E	-	E
Phosphoric Acid (crude)	G	E	-	E
Phosphoric Acid (molten)	U	-	-	-
Phosphoric Acid (40%)	G	E	-	E
Phosphoric Acid Anhydride	-	U	-	-
Phosphorus	E	-	-	-
Phosphorus Trichloride	U	L	-	-
Photographic Developer	E	E	-	E
Photographic Solutions	E	E	-	E
Phthalic Anhydride	U	E	-	-
Picric Acid	U	U	-	-
Potash (Potassium Carbonate)	E	-	L	E
Potassium Bicarbonate	E	-	-	E
Potassium Bromide	E	E	-	E
Potassium Chlorate	E	E	-	E
Potassium Chloride	E	E	E	E
Potassium Chromate	E	-	E	E

Chemical Resistance Data

Environmental Resistance Table: *E-Excellent, G-Good, L-Limited, U-Unsatisfactory*

IMPORTANT: These environmental resistance ratings are based upon tests where the specimens were placed in complete submergence in the reagent listed. Ratings listed in this chart apply to a 48-Hour exposure period. (The information in this chart is to be used **ONLY** as a guide in selecting equipment for appropriate chemical compatibility. Before permanent installation, test the equipment with the chemicals and under the specific conditions of your application.)

Chemical	PVC	Polycarbonate	FRP	Noryl	Chemical	PVC	Polycarbonate	FRP	Noryl
	Himeline HE - Opaque Cover w/Base	Circuit Safe NEMA Circuit Safe JIC Himeline HE - Clear Cover w/Base Himeline HS - Opaque w/Clear Lids	(Fiberglass Reinforced Polyester) Himeline HS - Bases Himeline HP Himeline HLA/HLS Himeline HLP	Circuit Safe Medium JIC		Himeline HE - Opaque Cover w/Base	Circuit Safe NEMA Circuit Safe JIC Himeline HE - Clear Cover w/Base Himeline HS - Opaque w/Clear Lids	(Fiberglass Reinforced Polyester) Himeline HS - Bases Himeline HP Himeline HLA/HLS Himeline HLP	Circuit Safe Medium JIC
Potassium Cyanide Solutions	E	-	-	E	Stannic Chloride	E	E	-	E
Potassium Dichromate	E	E	-	E	Stannic Fluoborate	-	-	-	E
Potassium Ferricyanide	E	-	E	E	Stannous Chloride	E	-	-	E
Potassium Ferrocyanide	E	-	E	E	Stearic Acid	G	E	-	E
Potassium Hydroxide (Caustic Potash)	E	U	L	E	Stoddard Solvent	L	E	-	U
Potassium Hypochlorite	G	-	-	-	Styrene	U	U	-	E
Potassium Iodide	E	-	-	-	Sulfate (Liquors)	G	-	-	-
Potassium Nitrate	E	E	E	E	Sulfur Chloride	L	-	-	E
Potassium Oxalate	-	-	-	-	Sulfur Dioxide	E	-	-	E
Potassium Permanganate	E	E	E	E	Sulfur Dioxide (dry)	E	E	-	E
Potassium Sulfate	E	E	E	E	Sulfur Hexafluoride	G	-	-	-
Potassium Sulfide	E	-	-	E	Sulfur Trioxide	E	-	-	U
Propane (liquefied)	E	L	-	E	Sulfur Trioxide (dry)	E	-	-	U
Propylene	G	-	-	-	Sulfuric Acid (<10%)	E	E	E	E
Propylene Glycol	L	G	-	-	Sulfuric Acid (10-75%)	E	G	U	E
Pyridine	U	U	-	G	Sulfuric Acid (75-100%)	U	U	-	E
Pyrogalllic Acid	E	-	-	-	Sulfuric Acid (cold concentrated)	U	-	-	E
Resorcinol	L	G	-	-	Sulfuric Acid (hot concentrated)	U	U	-	U
Rosins	L	-	-	-	Sulfurous Acid	E	-	-	E
Salicylic Acid	G	E	-	-	Tallow	-	-	-	E
Salt Brine (NaCl saturated)	E	E	-	E	Tannic Acid	E	L	-	E
Sea Water	E	E	-	E	Tanning Liquors	E	-	-	E
Silicone	E	E	-	E	Tartaric Acid	E	-	E	E
Silver Bromide	-	-	-	-	Tetrachloroethane	L	-	-	U
Silver Nitrate	-	-	-	E	Tetrachloroethylene	U	U	-	U
Soap Solutions	E	E	-	E	Tetrahydrofuran	U	U	L	U
Soda Ash (see Sodium Carbonate)	E	E	-	E	Tin Salts	E	-	-	-
Sodium Acetate	G	E	E	E	Toluene (Toluol)	U	U	-	U
Sodium Aluminate	-	-	-	E	Trichloroacetic Acid	G	U	-	-
Sodium Benzoate	G	E	-	-	Trichloroethane	L	U	-	U
Sodium Bicarbonate	E	E	E	E	Trichloroethylene	U	-	U	U
Sodium Bisulfate	E	E	-	E	Trichloropropane	-	-	-	U
Sodium Bisulfite	E	E	-	E	Tricresylphosphate	U	-	-	E
Sodium Borate (Borax)	E	E	-	E	Triethylamine	G	-	-	G
Sodium Bromide	G	-	E	E	Trisodium Phosphate	E	-	-	E
Sodium Carbonate	E	E	-	E	Turpentine	U	U	E	U
Sodium Chlorate	E	E	E	E	Urea	U	U	L	E
Sodium Chloride	E	E	E	E	Uric Acid	E	-	-	-
Sodium Chromate	-	E	-	E	Varnish	U	-	-	U
Sodium Cyanide	E	-	-	E	Vinegar	G	E	E	E
Sodium Ferrocyanide	E	-	E	E	Vinyl Acetate	U	-	-	-
Sodium Fluoride	E	-	-	E	Vinyl Chloride	U	-	-	-
Sodium Hydrosulfite	L	-	-	-	Water, Acid, Mine	G	G	-	-
Sodium Hydroxide (20%)	E	E	U	E	Water, Deionized	E	-	-	E
Sodium Hydroxide (50%)	E	U	U	E	Water, Distilled	E	E	-	E
Sodium Hydroxide (80%)	E	U	U	E	Water, Fresh	G	E	-	E
Sodium Hypochlorite (<20%)	E	L	L	E	Water, Salt	G	E	-	E
Sodium Hypochlorite (100%)	G	-	-	E	Whiskey & Wines	E	E	-	E
Sodium Metaphosphate	E	-	-	-	White Liquor (Pulp Mill)	E	-	-	E
Sodium Metasilicate	E	-	-	-	White Water (Paper Mill)	E	-	-	U
Sodium Nitrate	E	-	U	E	Xylene	U	U	E	G
Sodium Perborate	E	-	-	E	Zinc Chloride	G	E	E	E
Sodium Peroxide	G	E	-	-	Zinc Hydrosulfite	-	-	-	E
Sodium Polyphosphate	E	-	-	E	Zinc Sulfate	E	E	E	E
Sodium Silicate	E	-	-	E					
Sodium Sulfate	E	E	E	E					
Sodium Sulfide	E	U	U	E					
Sodium Sulfite	E	-	E	E					
Sodium Tetraborate	E	-	-	E					
Sodium Thiosulfate (hypo)	E	U	-	E					